


LILIN

AHD DOME IR CAMERA

Installation Guide

Part Description & Dimension

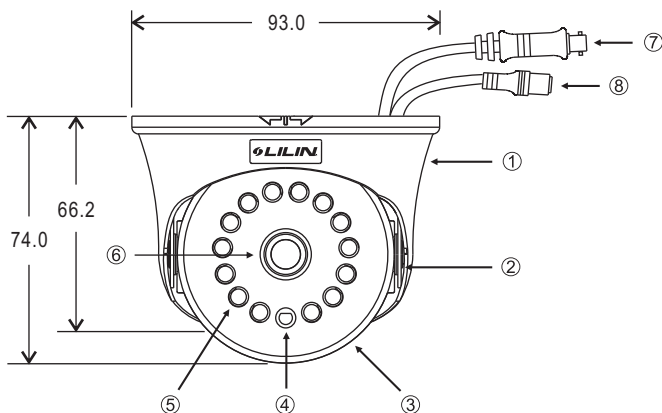

Unit : mm

- ① COVER
- ② BRACKET
- ③ CAMERA
- ④ LIGHT SENSOR
- ⑤ INFRARED LED
- ⑥ LENS
- ⑦ VIDEO OUTPUT JACK
- ⑧ DC POWER INPUT (DC12V $\pm$ 10%) JACK




66-AHD752ACSE-2

Warning: Do not throw your product in municipal waste.



This product has been designed to enable proper reuse of parts and recycling. The symbol of the crossed out wheeled bin indicates that the product (electrical and electronic equipment) should not be placed in municipal waste. Check local regulation for disposal of electronics products.

Installation



1. Take out the camera first, which is connected with the bracket, and turn the lens downward. Fix the bracket on the desired place with supplied screws (M4.0x25, wooden screw) (FIG. 1).




2. Adjust the camera to desired angle (should be between 40° to 90°, otherwise the cover will be difficult to replace), and then tighten two screws on both sides of the camera (FIG.2 & FIG.3).




3. Remove the cover. Align the mark on the cover with the hinge of the bracket (FIG.4) and turn clockwise to secure it properly to a locked position (FIG.5).



4. To remove the cover, turn the cover counterclockwise to unlock (FIG.6).



5. Connect to an Up-the-Coax (UTC) digital recorder that supports AHD-Coaxial protocol. Then use the 8-directional buttons (FIG. 7) to adjust settings for the best images.



5-1. USER OSD SETTING

- A. **↑ (UP)** : Press to move the cursor upwards or to select items.
- B. **← (LEFT)** : Press to move the cursor to the left and to select or adjust the parameters of the selected item. The parameters changes each time this button is pressed.
- C. **→ (RIGHT)** : Press to move the cursor to the right and select or adjust the parameters of the selected item. The parameters changes each time this button is pressed.
- D. **↓ (DOWN)** : Press to move the cursor downwards or to select items.
- E. **SET** : Executes selections and displays a submenu for an item with the  mark.