



Outdoor Housing

PIH-5063/5064/5067

INSTRUCTION MANUAL

IMPORTANT SAFEGUARDS

1. Read Instructions

All the safety and operating instructions should be read before the unit is operated.

2. Retain Instructions

The safety and operating instructions should be retained for future reference.

3. Read Warnings

All warnings on the unit and in the operating instructions should be adhered to.

4. Follow Instructions

All operating and user instructions should be followed.

5. Electrical Connections

Only a qualified electrician should make electrical connections.

6. Attachments

Do not use attachments not recommended by the product manufacturer as they may cause hazards.

7. Cable Runs

All cable runs must be within permissible distance.

8. Mounting

This unit must be properly and securely mounted to a supporting structure capable of sustaining the weight of the unit.

SAFETY PRECAUTIONS

	CAUTION RISK OF ELECTRIC SHOCK	
CAUTION : TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT OPEN COVER. NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.		



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the unit.

UNPACKING

Unpack carefully. Electronic components can be damaged if improperly handled or dropped. If an item appears to have been damaged in shipment, replace it properly in its carton and notify the shipper.

Be sure to save:


1. The shipping carton and packaging material. They are the safest material in which to make future shipments of the equipment.
2. This Installation and Operating Instruction.

SERVICE

If the unit ever needs repair service, the customer should contact our dealer or branch for authorization to return and shipping instructions.



Part Description & Dimension


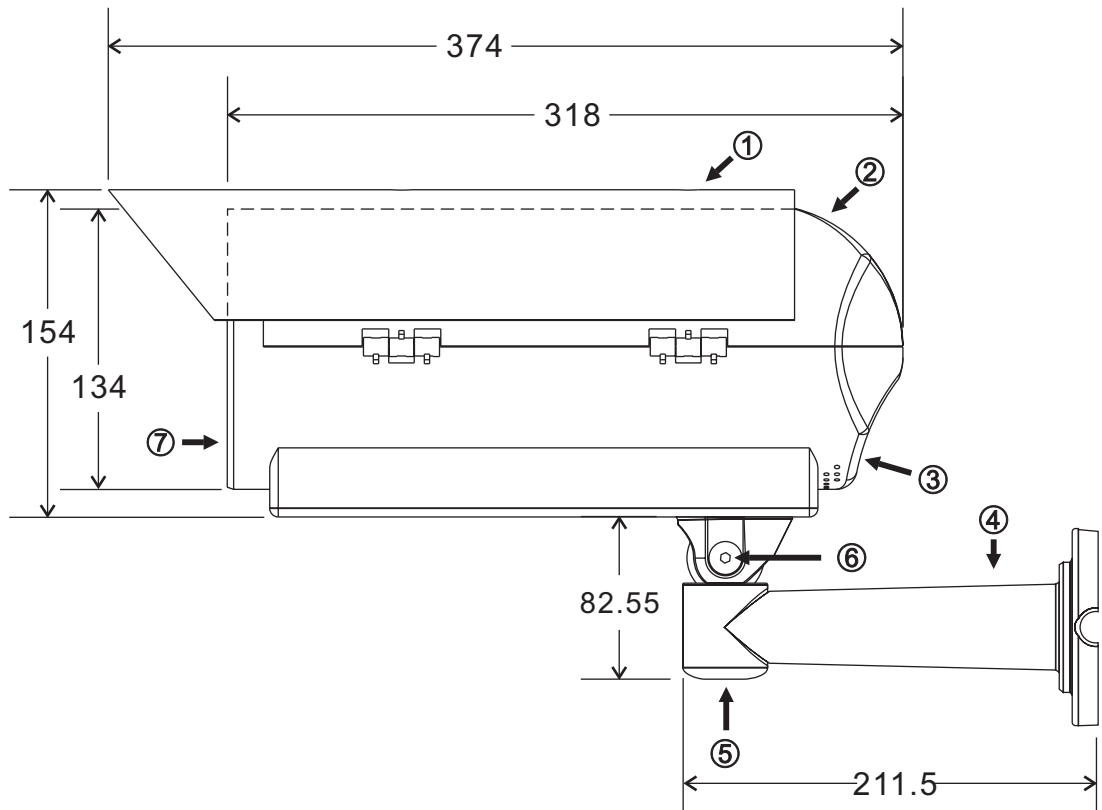


Unit : mm

- ① SUN SHIELD
- ② TOP COVER
- ③ BOTTOM CHASSIS
- ④ BRACKET
- ⑤ PAN ADJUSTMENT SCREW
- ⑥ TILT ADJUSTMENT SCREW
- ⑦ WINDOW





INSTALLATION

1. Take out the bracket from the box first. Put the power cable and video cable through the bracket and then fix it to the wall (FIG.1 & FIG.2).

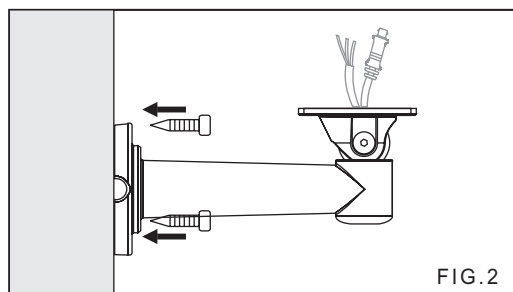
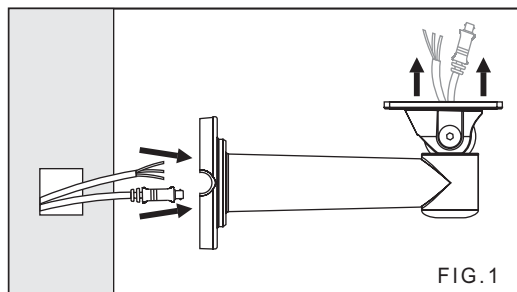


2. Secondly, take out the housing and open the top cover with hexagon screw driver (FIG.3). Loosen the screws on both sides of the supporter first, use provided 1/4"-20UNC screws (black-2pcs) to fix the camera on the supporter temporarily (FIG.4). Plug and fix the power cable of camera to the terminal (FIG.5).


Note : In order to adjust the camera position forward or backward later on, please do not fix the camera too tight.

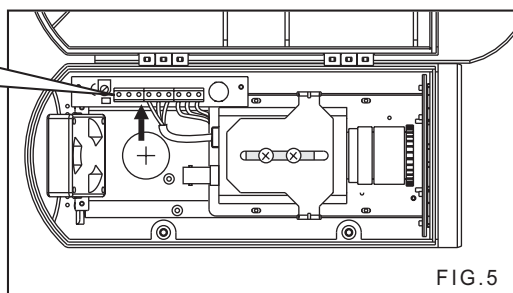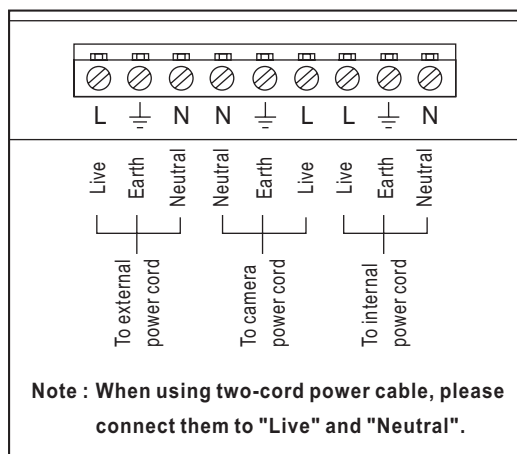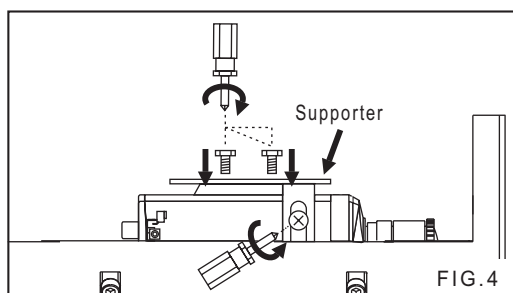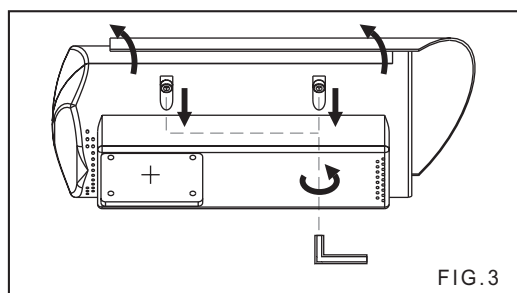




3. Put the power cable and video cable through the bottom of the housing (FIG.6). Plug and fix the power cable to the terminal and plug the video cable to video output of the camera (FIG.7).

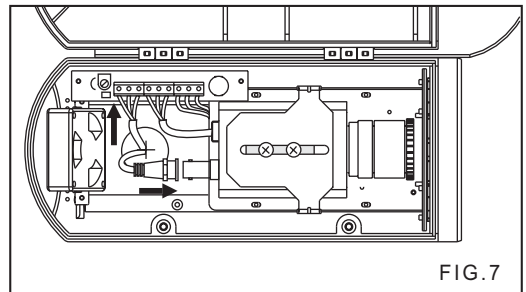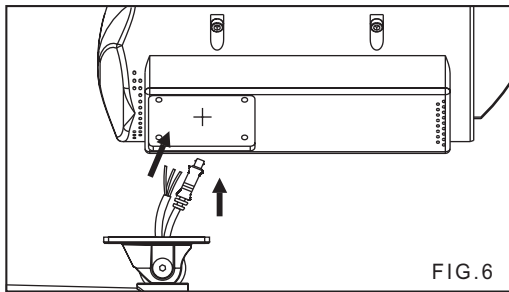


Next, use the provided 1/4"-20UNC screws (silver-4pcs) to fix the housing on the bracket with hexagon screw driver (FIG.8).

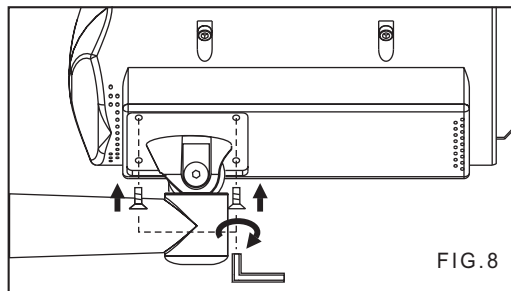



4. Adjust focus and iris of the lens on the camera and then adjust the camera position on the supporter (FIG.9 & FIG.10). After finished, tighten all screws (FIG.11).

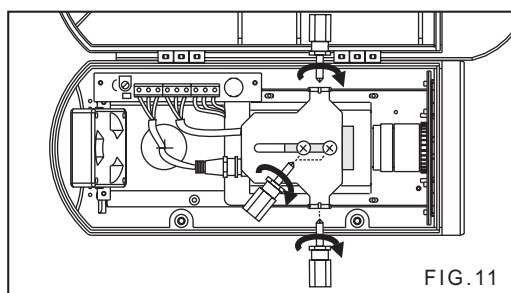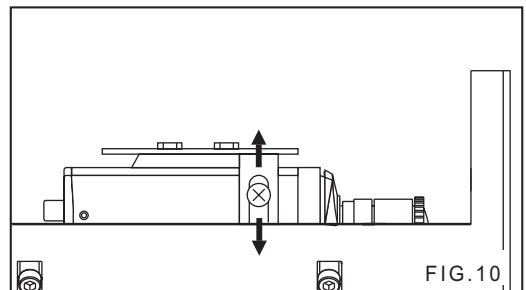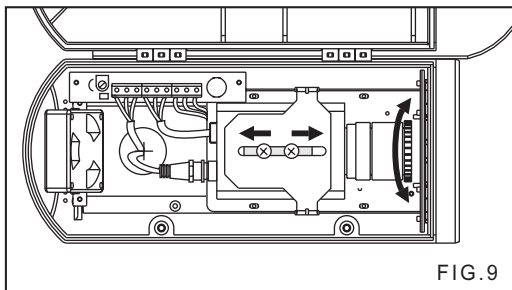

5. Loosen the pan and tilt adjustment screw on the bracket to turn the housing to the desired angle and then tighten the screw (FIG.12).

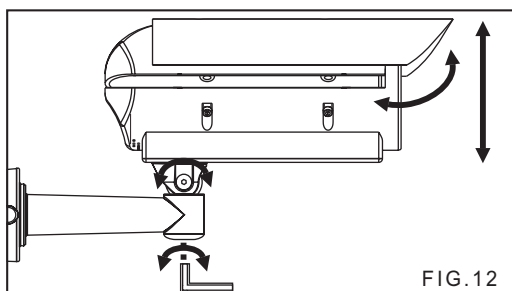

6. Replace the top cover and tighten the screws (FIG.13 & FIG.14).

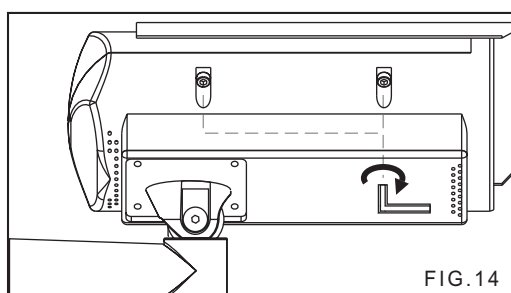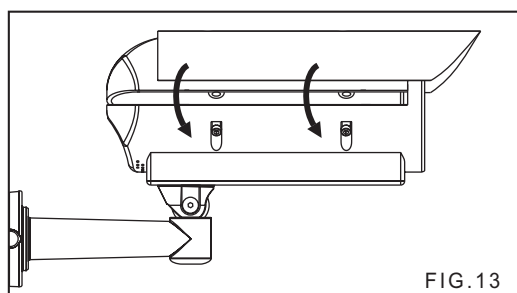

SPECIFICATIONS

OUTDOOR HOUSING			
Model No.	PIH-5063	PIH-5064	PIH-5067
Power Input Voltage	AC230V	AC24V	AC117V
Window	ϕ 110 Heat Resistant Glass		
Glass Thickness	3mm		
Blower Control	On : 35℃ , Off : 25℃		
Heater Control	On : 15℃ , Off : 25℃		
Suitable Camera and Lens	Max. 200mm Length		
IP Rating	IP66		
Mounting	Bottom		
Construction	Aluminum		
Power Consumption	29W	17W	
Operating Temperature	-20℃ ~ +60℃ (-4°F ~ +140°F)		
Dimension	Housing : ϕ 134 x 318 mm(L) , Bracket : 211.5mm(L)		
Weight	3000g		



MERIT LILIN ENT. CO., LTD
<http://www.meritlilin.com>

66-506CSE