


AHD7324AX10 10X D/N 1080P AHD VARI-FOCAL VR IR CAMERA

www.meritlilin.com


- ▶ Video Output: AHD 1080P / AHD 720P / TVI / CVI / CVBS
- ▶ AHD Cameras transmit data that is not encoded resulting in no process and no delay real time and complete transmission.
- ▶ Long transmission distance—Coaxial cable (3C/5C): 300M / 500M, Twisted cable: 300M
- ▶ Seamless compatibility with the standard Analog equipment
- ▶ Automatically activates IR LED: Blow 10Lux
- ▶ UTC function (AHD-Coaxial protocol)

Dimensions

Body:146(W) × 154(H) × 374(D), Bracket:211.5mm(L)

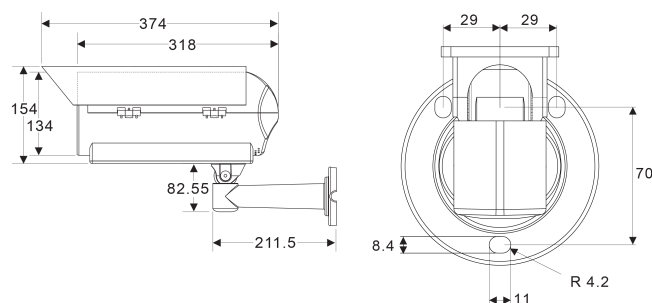

Video performance

Model	AHD7324AX10
Minimum Illumination	0.025 Lux / F1.6, 0 Lux (IR On)
Video Output	AHD 1080P / AHD 720P / TVI / CVI / CVBS
Resolution	1,920 (H) × 1,080 (V) @ 30/25 fps
System	NTSC or PAL

Night vision (infrared LED)

Focal length	5 – 50mm
Iris	F1.6
Angle of view	51.4° – 7.6°(H) 29° – 4.3°(V) 58.7° – 8.7°(D)
Window	Ø110 Heat Resistant Glass
Peak Wavelength	850nm
Beam Spread	15°+25°
Radiant Distance	100M

Sensor

Pick Up Element	1/2.9" CMOS Image Sensor
Effective Pixels	1,985 (H) × 1,105 (V)

Certifications

IP Rating	IP66
-----------	------

Environmental

Operation Temperature	- 40°C – + 50°C (-40°F – 122°F)
Blower Control	On: 35°C, Off: 25°C
Heater Control	On: 15°C, Off: 25°C

Video functions

Scanning System	Progressive Scan
Menu Control	OSD Control
Sync. Mode	Internal
Infrared Cut Filter	Auto Selectable, Automatic Switch from Color Mode to Monochrome
S/N Ratio	More Than 55dB (AGC Off)
UTC	AHD-Coaxial protocol Supported
Auto Gain Control	Auto
White Balance	ATW / MANUAL
Shutter	Auto:1/60(1/50)S – 1/50,000S
D-WDR	OFF / ON
Exposure Mode	GLOBE / CENTER / BLC / FLC
Noise Reduction	2DNR
OSD Language	ENGLISH, 中文(簡), ESPANOL, FRANCAIS, 繁体中文, PYCCKNN, ITALIANO, EAAHNIKA, 한국어, 日本語, PORTUGUES, POLISH

Mechanical

Dimensions (mm)	Body:146(W) × 154(H) × 374(D), Bracket:211.5mm(L)
Weight	3500g approx.

Power

Power Input Voltage	AC24V ±10%
Power Consumption	13W