

AHD751


D/N 720P AHD DOME IR Camera



FEATURES:

- Video Output: AHD 720P / Analog 1280H
- AHD Cameras transmit data that is not encoded resulting in no process and no delay real time and complete transmission.
- Long transmission distance—Coaxial cable (3C/5C): 300M
- Seamless compatibility with the standard Analog equipment
- Automatically activates IR LED: Blow 10Lux

Ø 93 x 74mm (H)

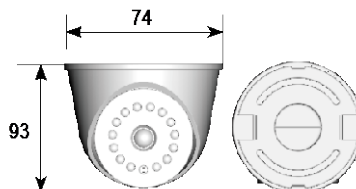

D/N 720P AHD DOME IR Camera

Model		AHD751A3.6	AHD751A6
Lens	Focal length	3.6mm	6mm
	Iris	F2.0	F1.8
	Angle of view	H	46.5°
		V	34.5°
		D	59.3°
Power Input Voltage		DC12V ±10%	
System		NTSC or PAL	
Pick Up Element		1/3" CMOS Image Sensor	
Effective Pixels		1,305 (H) x 977 (V)	
Scanning System		Progressive Scan	
Menu Control		OSD Control	
Sync. Mode		Internal	
Infrared Cut Filter		Auto Selectable, Automatic Switch from Color Mode to Monochrome	
Resolution		1280 (H) x 720 (V) @ 30/25 fps	
Minimum Illumination		0.02 Lux / F1.8, 0 Lux (IR On)	
S/N Ratio		More Than 55dB (AGC Off)	
Auto Gain Control		Auto (16 Steps)	
White Balance		ATW / AWC / INDOOR / OUTDOOR / MANUAL / AWB	
Shutter	Auto	1/60(1/50)S ~ 1/50,000S	
	Manual	1/30(1/25)S, 1/60(1/50)S, FLK, 1/240S, 1/480S, 1/1,000S, 1/2,000S, 1/5,000S, 1/10,000S, 1/50,000S	
Sense-Up		OFF / AUTO (X2 ~ X30)	
D-WDR		OFF / ON / AUTO	
Back Light Compensation		OFF / BLC / HSBC	
Noise Reduction		2DNR & 3DNR	
Defog		OFF / AUTO	
Privacy masking		OFF / ON	
Privacy masking Zone		4 Zones	
OSD Language		ENG / CHN1 / CHN2 / GER / FRA / ITA / SPA / POL / RUS / POR / NED / TUR	
Video Output		AHD720P / 1280H	
Power Consumption		3W	
Operation Temperature		- 10°C ~ + 50°C (-14°F ~ 122°F)	
Infrared LED	Peak Wavelength	850nm	
	Beam Spread	30°	
	Radiant Distance	16M	
Dimension		φ93 x 74mm (H)	
Weight		230g	

No liability will be accepted for any errors or omissions. Design and specifications are subject to change without notice.