

LR652

Outdoor HD 30M-Range IR Fixed Dome IP Camera





- ▶ Outdoor Dome Camera
- ▶ IR cut filter for day/night operations
- ▶ IP67 rain and dust resistant
- ▶ 30-meter infrared night vision
- ▶ 1080p resolution @ 15 FPS



Dimensions (unit in mm): Ø115mm x 91mm

LR652 HD 30M-Range IR Fixed Dome IP Camera in the L series features 1080p resolution at 15 frames per second, built-in Sense up+ technology to deliver stunning video in low-light conditions, and intelligent video surveillance (IVS) functions. Utilizing IP67, HDR, AGC control, and 3D Noise Reduction, the combination successfully delivers the ultimate low-light image with infrared. The support of PoE, privacy mask, and white balance, as well as the minimum illumination of 0.15 Lux at F2.0 will satisfy multiple applications.

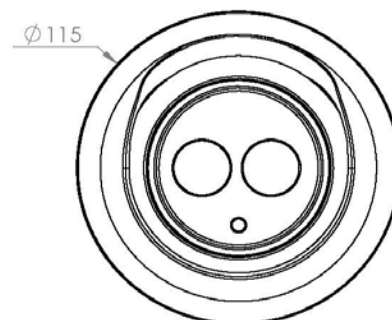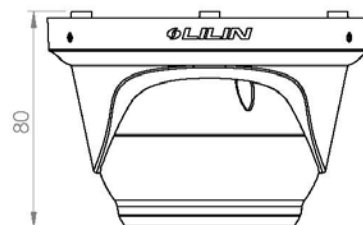

Back Light Compensation

Back Light Compensation (BLC) adjusts the exposure of the entire image to properly expose the subject of interest. Whether the subject is moving toward left, right, up, down, or any direction on the screen, BLC will provide the perfect exposure for the subject in front of a strong back light.



Sense Up+

Sense up+ is able to deliver outstanding video outputs in poor light conditions without experiencing motion blur. With this technology, you can see video more clearly during nighttime when sufficient lighting is lacking.



Video Security App

Available on Android and iOS – LILIN Pro app provides security alarm push notification, real-time live viewing, and remote video playback




Day and Night Operations via Removal of the IR-cut filter

LR652 is equipped with a mechanical IR cut filter to increase IR sensitivity and improve nighttime images. The adjustable filter allows day and night operations even in the low lux conditions, and can provide outstanding vision.



Built-in IR Illumination

The camera includes infrared (IR) LEDs for IR illumination to provide night vision up to 30 meters.



Motion Detection

If properly set up, any motion in front of the camera will be detected and saved as an event. Motion in the selected area will provoke an alert.



ONVIF-compliant

Open Network Video Interface Forum (ONVIF) is a standard for physical IP based security products. LR652 camera is ONVIF Profile S conformant



Wind and Rain Standards

Meet international IP67 standards for dust and moisture resistant. In installations in environments, all cameras are subject to wind and rain

Privacy Masking

Privacy Masking can protect personal privacy by concealing specific areas in the camera's field of view. Doorways and house windows for example are not subject to surveillance.



Technical Specifications

LR652

Outdoor HD 30M-Range IR Fixed Dome IP Camera (1080p @ 15 FPS)

Video performance

Model#	LR652
Min. Illumination	0.15 Lux at F2.0 (Colour) 0.05 Lux at F2.0 (B/W)
With Infrared LED	0 Lux

Power

Power consumption	DC12V, 5.8W / PoE, 7W
PoE	IEEE 802.3af
Power supply	DC12V $\pm$ 10% Power over Ethernet (IEEE 802.3af)

Sensor

Sensor type	1/2.7" CMOS image sensor
Total sensor pixels	1920 (H) x 1080 (V) = 2,073,600 pixels

Certifications

CE	Yes, EMI CLASS B
FCC	Yes, EMI CLASS B
IP Rating	IP67 waterproof / IK10

PC requirement

CPU	Intel i3 or above
OS	Windows 7, Windows 8, Windows 10
RAM	4GB or above, dedicated graphics card

Mechanical

Dimensions	115mm x 91mm approx.
Weight	450g

Video streaming

Video compression	H.264, Motion JPEG
Streaming	RTP/HTTP, RTP/TCP, RTP/UDP, Multicast Multiple configurable streams in H.264 and Motion JPEG, configurable frame rate and bandwidth
Bitrate	128Kbps - 8Mbps Frame rate and bit rate controllable on-the-fly VBR / CBR / GOP supported Fixed bitrate

Network security

Max number of online users	10 user accounts available
Access	Multiple user access levels with password protection
Encryption	Base 64 HTTP encryption
IP address filter	Yes
RTSP Authentication	On / Off

Integration

Mobile application	Integrated to LILIN mobile app (LILIN Pro) iPhone, iPad, Android support
Video management	ONVIF Profile S LILIN Navigator Enterprise 5.0 Third party VMS through LILIN HTTP API
Web browser	Microsoft® Internet Explorer® 10 and later
Firmware	Firmware upgrade via HTTP, and IP Scan
Alarm event triggers	Motion / Network lost detection
Alarm event actions	FTP / SMTP / HTTP post / SD card / SAMBA / SNMP Trap / Push Service notification
Alarm weighted mode	Yes

Environmental

Operating temperature	-40°C - +50°C (-40°F - 122°F)
-----------------------	-------------------------------

Lens / Night vision (infrared LED)

Focal length		4mm
Iris		F2.0
Angle of view	H	94°
	V	50°
	D	102°
Distance		30m
Peak wavelength		850nm
Beam spread		30° 50°

Video resolutions (H x V)

1080P	1920 x 1080
720P	1280 x 720
D1	720 x 480
CIF	352 X 240
Maximum frame rate	H.264: up to 15 FPS @ 1920 x 1080, 30 FPS @ 720 x 480
	Motion JPEG: up to 15 FPS @ 1920 x 1080 30 FPS @ 720 x 480, 30 FPS @ 352 x 240

Video functions

Day/Night (IR-cut filter)	Color (Day), Monochrome (Night), Auto, Schedule
Scanning system	Progressive scan
Adjustable picture setting	Contrast, Brightness, Saturation
White balance	Auto / Tungsten / Indoor / Fluorescents1 / Fluorescents2 / Outdoor1 / Outdoor2
Shutter	1/30(1/25)s to 1/8000s
Back light compensation	On / Off
2D WDR	Off / Auto / x2 / x3 / x4
3D noise reduction	Off / 1 to 32 selectable
Privacy masking	Off / On (4 independent areas)
Sense Up	Off / 1 frame / 2 frames / 3 frames / 7 frames
Sense Up+	Yes
Auto gain control	36 dB variable gain
Other functions	Sharpness, Image flip, Image mirror, Hue, Corridor
D/N quality setting	Yes

Network

Ethernet	10/100 Mbps Base-T (Tx), RJ-45
Connectivity	ONVIF Profile S / LILIN API (CGI)
User accounts	10 simultaneous users
OSD	Text over date, time, and camera name
CPU, Memory	Embedded SoC ARM11, 528MHz, 256MB DDR3, 256MB flash memory
Video display	LILIN Universal ActiveX & LILIN Java Applet
OS	Embedded Linux 2.6.32
Protocols	IPv4, IPv6, TCP, UDP, HTTP, SMTP, NTP, DDNS, UPnP, FTP, ARP, DHCP, PPPoE, DNS, RTSP, RTCP, Telnet, ICMP, IGMP, ONVIF Profile S, SNMP, SIP, SDDP, Bonjour
Languages	English, Traditional Chinese, Simplified Chinese, Spanish, Italian, Turkish, Russian, Korean, French, Arabic, Hungarian, Japanese
Multi IP address	Yes

Warranty

Warranty	Warranty 3 Year(s)
----------	--------------------

Copyright © Merit LILIN 2017 | All rights reserved | Product specifications and availability are subject to change without notice