

NAV08072

NAV 72CH Recorder



LILIN NAV08072 72 Channel Recorder supports LILIN IP cameras, PTZ domes, and DVRs/NVRs. The recorder features up to 72 channels 1080P/3M/4M/5M/8M network streaming, recording, and display. It is built-in dual port Gigabit Ethernet, and dual monitors supported. It also supports multi-channels playback for remote or local. NAV08072 is capable of supporting multi-camera installations where LILIN cameras are installed, and NAV delivers a solid surveillance platform with offering all the basic features, as well as some of the more advanced ones that a basic security system requires.

ePTZ feature and ePOS integration are also provided for free of charge. The maximum video speed can perform 3,840X2,160 at 30 frames per second. It supports up to 2 monitors. Keyboard is controllable via RS-485 for PTZ, ePTZ, and ROI region of interest features. Two-way audio and recording are available.




Features

- ▶ ONVIF Profile S, LILIN IP cameras, PTZ domes, and DVRs/NVRs are supported
- ▶ Up to 72 channels 1080P/3M/4M/5M/8M network streaming, recording, and display
- ▶ 2U 19" chassis, built-in hardware RAID system, support up to 8 x 3.5" hot-swap HDDs
- ▶ Failover, video achieve, and Smart Search support.
- ▶ Dual streaming decoding mode supported
- ▶ Dual 4K monitors support, up to 72 channels video display
- ▶ Support multi-channels playback for remote or local
- ▶ Support image archiving mechanisms
- ▶ Built-in dual port Gigabit Ethernet
- ▶ Provide up to 500Mbps upload network speed and 500Mbps download network speed

Dimensions (unit in mm):

437(H) × 533.4 (W) × 88.9 (D)

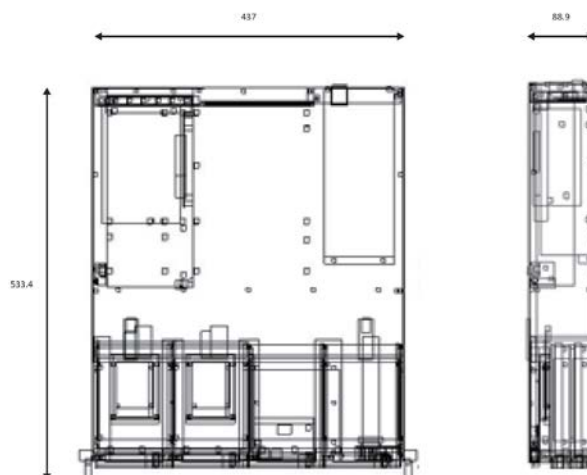

Technical Specifications

NAV08072

NAV 72CH Recorder	
NAV 72CH Recorder	
Model	NAV08072
Network video support	ONVIF Profile S, LILIN IP camera, LILIN IP PTZ dome, LILIN DVR/NVR, NAV Server
Input	Up to 72 channels at 1080P/3M/4M/5M/8M
Network video format	H.264 / MJPEG
Maximum network throughput	Upload: up to 500Mbps/ Download: up to 500Mbps
Internal HDD	Hot-swap 3.5" SATA HDDx 8

Recording	
Recording schedule	7 days x 24 hrs time table, recording mode configurable

Certification	
CE	Yes
FCC	Yes

Recording mode	
Recording mode	Alarm, motion, schedule, and manual
Recording speed	Max 8MP@30fps, 5MP@12 fps, 4MP@20fps, 3MP@15 fps, 1080p@120 fps, and ROI recording supported
Recording resolution	3840x2160, 2592x1944, 2048x1536, 1920x1080, 1280x1024, 1280x768, (720x480 / 720x576), 320x240
Alarm recording	Face detection, audio detection, tamper, motion, DI alarm detection, and ANPR (optional)
Audio recording	Yes
Circular recording	Yes / size customizable
Limited recording	Yes / days customizable
Video archiving	Yes
Low bitrate recording	Yes
Remote network raid	Yes

Playback	
Playback search	Date, time, event, POS SmartSearch, motion SmartSearch, plate search (optional), record tagging
Playback resolution	3840x2160, 2592x1944, 2048x1536, 1920x1080, 1280x1024, 1280x768, (720x480 / 720x576), 320x240
Video speed	Max 8MP@30fps, 5MP@12 fps, 4MP@20fps, 3MP@15 fps, 1080p@120 fps
Playback speed	FR: 1/8, 1/4, 1/2, 1X, 2X, 4X, 8X, 16X 32X / FF: 1/8, 1/4, 1/2, 1X, 2X, 4X, 8X, 16X, 32X
Back up	Max. 72 channels, AVI file format supported
Video input	Max. 72 channels
Remote video	NAV Server/Navigator Client/DVR/NVR/IP camera SD card supported, max. 72 channels

Video input	
Support quantity	Max. 72 channels
Camera name	20 characters
Channel editing	Mouse drag-n-drop
Digital zoom	Yes, ePTZ supported
Grouping	User grouping authentication assignable for eMap, and Navigator 2.0
Remote monitoring	Yes

Video output	
HDMI output	x 2 up to 3840 x 2160(4K)
Output	x1 (DVI-I)
TV wall	Dual screen, max. 72 channels
Split screen	4, 9, 16, 25, 36
Dual stream technology	Multi-channel displays D1 and full screen displays 1080P/3M/4M/5M/8M resolution
Multi-screen	Dual-screen

Video archiving	
Video archiving & sync	Individual camera configurable, scheduling and instant archiving, sync recording data with NAV server/NVR/DVR/IP camera SD card.

Alarm / event	
Alarm management	Alarm popup for full screen, pc sound, redirect IP camera's digital output, email snapshots, redirect a PTZ preset recall
Alarm recording	Pre-alarm:1 – 5 seconds and post-alarm: 1 sec – 59 minutes
Alarm event actions	Various alarm log including video loss, stop recording, schedule, logon, operation log
Digital output	Controllable via IP cameras

Accessories	
Keyboard keypad	PIH-931D keyboard controllable via rs-485 for PTZ, ePTZ, and ROI features
Audio	PCM, two-way audio, audio recording
PoS	PS/2
Protocols	ARP / TCP/IP / HTTP / SMTP / DNS / PPPoE/ ONVIF
Mobile phone	iPhone and Android
IP Scan	Supported, easy-to-setup for IP address

Hardware	
CPU	Intel® Core™ i5-6500 Processor
RAM	4G DDR4 x 2
Chipset	Intel® Q170 Chipset
Display card	Intel® HD Graphics 530
USB port	USB 3.0 x 10
System FAN	80mm hot-swap PWM fans x 3 / 80mm rear exhaust fans x 2
Raid control	LSI SAS_9361-8I
Raid mode	LSI Hardware, RAID 0, 1, 5, 6, 10, 50, 60
SSD HDD	120GB SATA3 SSD x1 (We suggest that you use WD Red HDD. Since the WD Purple HDD is not suitable to be used on NAS environment or RAID environment on a PC, WD Red HDD will be your best choice. The WD Datacenter HDD is suitable for a large RAID configuration environment.)

Other	
WDT	NAV failover / NAV monitoring station
DST	Daylight saving time by Windows OS
Languages	English, Traditional Chinese, Spanish, German, French, Russian, Japanese, Portuguese, Italian, Simplified Chinese, Czech, Slovenian, Hungarian, Turkish, Arabic, Persian, Bengali, Vietnamese
OS	Windows 7 embedded standard

Power and environment	
Power consumption	ATX 500W
Power supply	110V~240V
Operating temperature	0°C~40°C
Storage temperature	-20°C~60°C
Storage humidity	10%-80% @40°C; non-condensing
Dimension	437mm x 533.4mm x 88.9mm
Weight	12 Kg

Copyright © Merit LILIN 2017 | All rights reserved | Product specifications and availability are subject to change without notice