
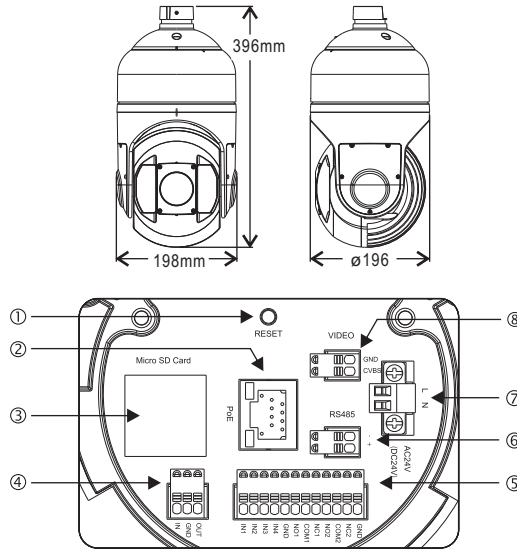


20X/30X PoE IR Fast Dome IP CAMERA

Installation Guide

66-5024CSB-1

Part Description & Dimensions

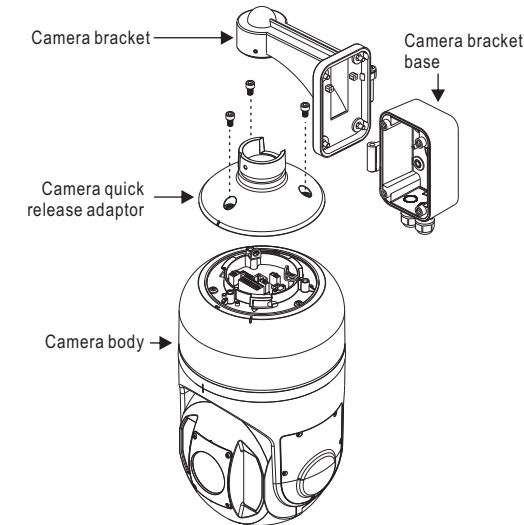

- ① Reset button
- ② RJ-45 network connector (PoE supported)
Recommended cable: CAT5
- ③ Micro SD card slot: supports Micro SD and SDHC card
- ④ Audio In/Out
Audio signal: 1.4Vp-p(1 Vrms)
Recommended cable: shielded signal cable
- ⑤ Alarm In/Out
Every camera provides 4 external alarm inputs and 2 alarm outputs
Voltage for alarm inputs: 5.6Vmax; alarm output: 1A 24VDC
Recommended cable: UL 26AWG 80°C 300V
UL 24AWG 80°C 300V
- ⑥ RS-485 connector
- ⑦ Power cable (AC24V)
Recommended cable:

Copper Wire (AWG)		#24 (0.22mm ²)	#22 (0.33mm ²)	#20 (0.52mm ²)	#18 (0.83mm ²)
Cable Length (approx.)	(m)	20	30	45	75
	(ft)	65	100	160	260


- ⑧ Video Out
Video signal output: CVBS 1.0Vp-p 75Ω BNC
Recommended cable: CABLE 5C2V

Installation


- **Step 1** Remove the bracket from the base
Loosen the four bolts from the base (FIG. 1) and push the hinge upwards to separate it from the base (FIG. 2).




Warning: Do not throw your product in municipal waste.
This product has been designed to enable proper reuse of parts and recycling.
The symbol of the crossed out wheeled bin indicates that the product (electrical and electronic equipment) should not be placed in municipal waste.
Check local regulation for disposal of electronics products.

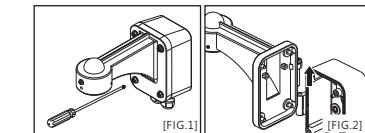


- **Step 2** Secure the bracket base to the wall
Attach the installation sticker to the wall and drill four holes according to the instructions (FIG. 3). Tighten four bolts to secure the base to the wall (FIG. 4). To use the central hole on the base, first hammer the lid off (FIG. 5).
Note: The bolts are not included in the package.

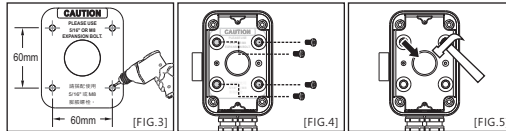


- **Step 3** Attach the quick release adaptor to the bracket
First remove the quick release adaptor from the camera body. Align the adaptor with the bracket before tightening the bracket bolts (FIG. 6 & FIG. 7). Then slide the adaptor and bracket together down the hinge to connect to the base (FIG. 8).
Note: The three bolts on the adaptor must be loosened first to remove the adaptor.

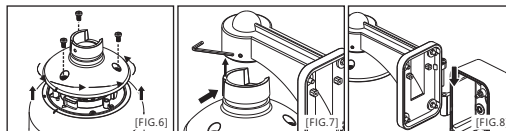


- **Step 4** Slip the control wires through the bracket
Properly secure the safety strap to the bracket, and slip the safety strap, RJ-45 cable, and AC24V power connector through the bracket (FIG. 9 & FIG. 10).
Secure the bracket to the base (FIG. 11)
Note: The AC24V power connector is not needed to be connected when a PoE device is used.

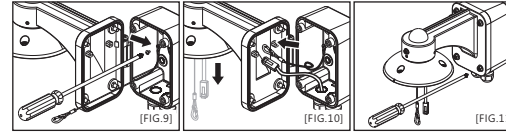

- **Step 5** Connect the control wires
To prevent the camera from falling, you should first secure the safety strap to the camera body (FIG. 12). Next, connect the RJ-45 cable and AC24V power connector to the hub on the body (FIG. 13 & FIG. 14).

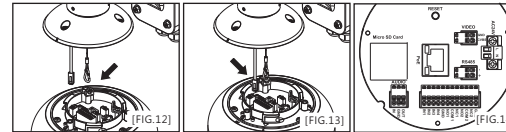

- **Step 6** Install the camera body
Align markings on the quick release adaptor and the camera body. Twist the camera body clockwise into the adaptor (FIG. 15). Tighten the three bolts on the adaptor (FIG. 16) to secure the camera and finish the installation (FIG. 17).

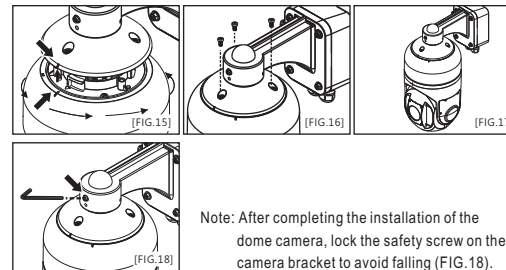

Note: After completing the installation of the dome camera, lock the safety screw on the camera bracket to avoid falling (FIG. 18).

Low Temperature Power-Up

Camera may perform abnormally at low temperature. Hence, follow the below procedure when the camera is off due to power outage or other issues and needs to be restarted under -40°C to -5°C.

Low temperature power-up procedure

Power up and wait for the heater to warm up for 15 minutes before you operate the camera.

Before Accessing IP Cameras

Before accessing the IP camera, make sure that the camera's RJ-45 network, audio, and power cables are properly connected. To set the IP address, consult your network administrator for an available IP address. The default IP address for each IP camera is 192.168.0.200. Users can use the default IP address for verifying the camera's network connection.

Software Requirements

Universal ActiveX software components are required for web interface display of JPEG or Full HD video. When you login to the IP camera by Internet Explorer, the security warning dialog box will prompt the installation of the Universal ActiveX. Click **Install** to download it.

Emergency Factory Default

To restore the hardware to factory default settings, please follow these steps:

1. Press and hold "RESET Key" for 10 seconds and release.
 2. Wait for about 40 seconds, and the network LED light should turn off, and go back on again.
 3. The camera is now restored to factory default settings, and will reboot automatically.
 4. Search for the IP device using the IPScan software.
 5. Start the IP device via an Internet browser.
 6. Enter the username and password to operate.
- NOTE1:** The factory default username and password are empty, and the user can set an account for login.
NOTE2: The IP address will revert to the default setting of 192.168.0.200.

Configuring IP Addresses via Web Interface


To change an IP address via web interface, type the default IP address (192.168.0.200) in the Internet browser and follow the steps below:

1. Login to the Full HD IP camera with the set username and password.
2. Click **Basic Mode** configuration hyperlink.
3. Click **Network->General** hyperlink.
4. Change the IP address, subnet mask, gateway, or HTTP port for the IP camera.
5. Click **Submit** to verify the settings.

Configuring IP Addresses with IPScan Software


To change the settings of the IP address, subnet mask, gateway, or HTTP port, you can follow the steps below:

1. Run the IPScan software.
2. Click **Refresh**. All available devices should be listed in the device list.
3. Select your device from the list provided.
4. Change the IP address, subnet mask, gateway, or HTTP port for the IP camera.
5. Click **Apply** to submit the settings.
6. Click **Refresh** to verify the settings.

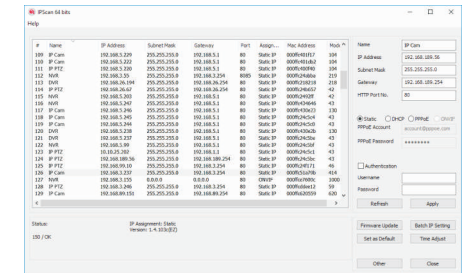

Login

The factory default username and password are empty. To login to the Full HD IP camera, please set the username and password on the login page. Press [Login] to complete the setting and login simultaneously.




Password have to meet the following criteria:

1. More than or equal to 8 characters.
2. Allow uppercase letter, lowercase letter, number digit, and special character.
3. Must have at least three types of character sets.

室外型PoE紅外線高速球型網路攝影機

安裝說明

部件說明及尺寸

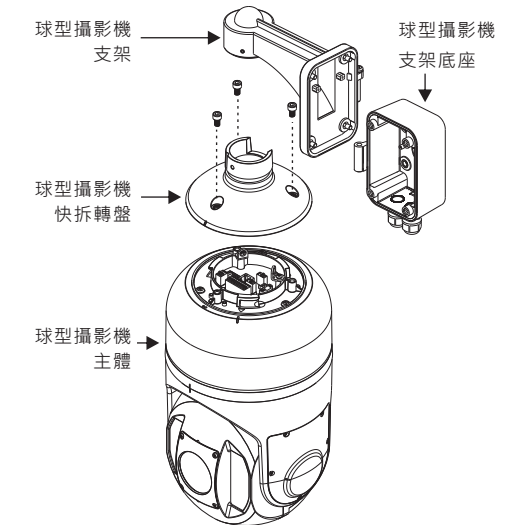



- ① 攝影機恢復出廠預設值按鍵
- ② RJ-45網路連接端子 (含PoE)
LAN: 10/100Mbps
建議線材規格: CAT5
- ③ Micro SD卡插槽: 支援Micro SD及SDHC卡
- ④ 聲音輸入/輸出端子 (Audio In/Out)
聲音信號: 1.4Vp-p(1 Vrms)
建議使用線材規格: 信號隔離線
- ⑤ 警報輸入輸出連接器 (Alarm In/Out)
每一台快速球型攝影機提供4個外部觸發警報輸入點及2個警報觸發輸出。
警報輸入點電壓5.6Vmax, 警報輸出規格1A 24VDC
建議使用線材規格: UL 26AWG 80°C 300V
UL 24AWG 80°C 300V
- ⑥ RS-485連接端子
電源輸入端子 (AC24V)
建議使用線材規格尺寸:

銅線規格 (AWG)	#24 (0.22mm ²)	#22 (0.33mm ²)	#20 (0.52mm ²)	#18 (0.83mm ²)
電纜長度 (約)	(米) 20	30	45	75
(英尺)	65	100	160	260


- ⑦ 影像輸出端子 (Video Out)
- ⑧ 影像信號輸出CVBS 1.0Vp-p 75Ω BNC
建議使用線材規格: CABLE 5C2V

安裝


- 步驟1 將支架與支架底座拆開
將4顆螺絲由支架底座轉開 (圖1) , 再將支架由門栓處往上推與支架底座分離 (圖2) 。

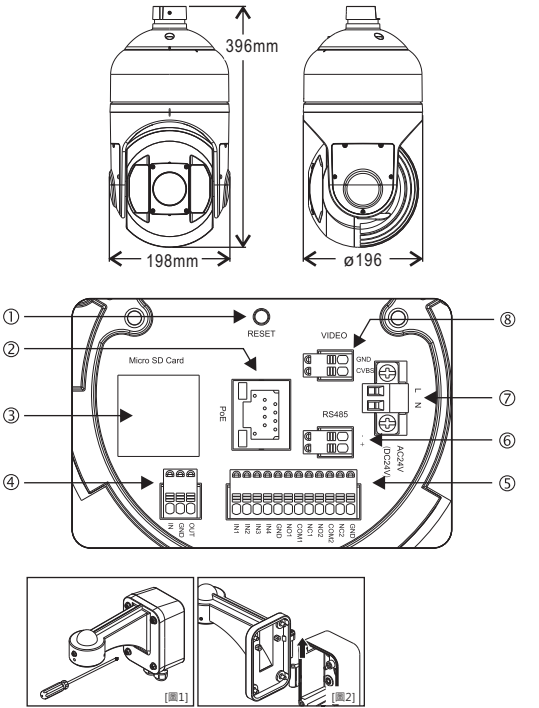


- 步驟2 將支架底座固定於牆壁
先將安裝孔位貼紙黏貼於牆上欲安裝之位置並鑽孔 (圖3) , 再將支架底座對準孔位鎖入4顆螺絲固定於牆壁 (圖4) 。如需使用支架底座中央圓孔, 請於安裝前先使用工具將此圓孔敲下 (圖5) 。
- 註: 1. 壁掛螺絲長度建議1.5英吋(38.1mm)以上
2. 螺絲非配件, 請使用者自行處理。

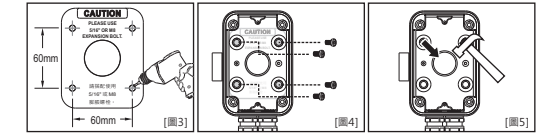


- 步驟3 將攝影機快拆轉盤與支架結合固定
先將攝影機快拆轉盤由攝影機主體卸下, 對準凹槽將快拆轉盤與支架結合並將支架螺絲鎖緊固定 (圖6&圖7) ; 再將支架轉盤組由門栓處往下與支架底座結合 (圖8) 。
- 註: 攝影機快拆轉盤上的3顆螺絲必需完全取下, 方可將快拆轉盤卸下

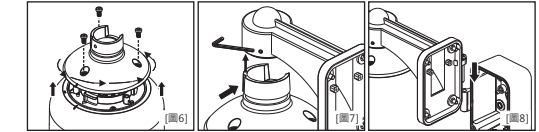


- 步驟4 將控制線組穿過支架
先將攝影機安全吊繩鎖上支架底座, 再將攝影機安全吊繩、RJ-45網路連接線及AC24V電源連接線穿過支架 (圖9&圖10) 。接著再將支架鎖回支架底座 (圖11) 。
- 註: 使用PoE供電設備時, 則無需連接AC24V電源連接線。

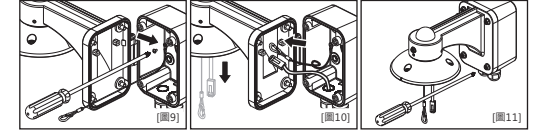

- 步驟5 連接控制線組
先將攝影機安全吊繩扣在攝影機主體上, 避免掉落 (圖12) ; 再連接RJ-45網路連接線及AC24V電源連接線至攝影機主體的連接座上 (圖13&圖14) 。

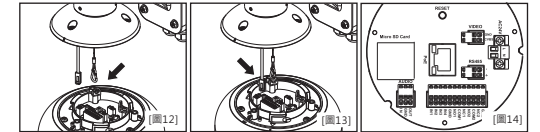

- 步驟6 安裝攝影機主體
對準快拆轉盤及攝影機主體上的刻痕, 將攝影機主體以順時針方向旋入快拆轉盤 (圖15) 並將快拆轉盤上的3顆螺絲鎖緊 (圖16) 固定攝影機主體, 完成球型攝影機安裝 (圖17) 。

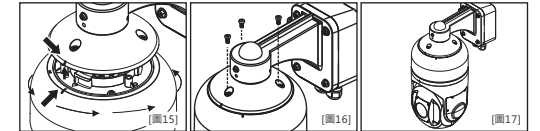

- 注意:
完成球型攝影機安裝後, 請將支架上的安全螺絲鎖緊, 避免掉落 (圖18) 。

低溫啟動

在低溫環境中啟動攝影機時, 因為內部溫度過低, 可能導致攝影機動作異常。
因此, 當攝影機由於停電或其它原因, 需要在-40°C至-5°C的環境中啟動時, 本機需執行低溫啟動程序。
低溫啟動步驟
開啟電源, 等待加熱器工作1.5小時後, 溫度檢知開關啟動, 開啟系統電源, 系統開始運作。

安裝前準備

在使用Full HD IP攝影機之前, 請先確認攝影機RJ-45網路接頭和電源接頭是否接妥, 並請網管人員提供一組未經使用的IP位址。出廠預設IP位址為192.168.0.200, 使用者可以先行使用該IP位址去更改相關網路設定。

軟體需求

Full HD 網路攝影機需要軟體解壓縮器顯示影像, Full HD 網路攝影機的網頁介面需使用該軟體。當您第一次登錄本產品, Full HD 網路攝影機的網頁介面會自動安裝Universal ActiveX元件, 請按下「安裝」鍵安裝該元件。

回復出廠預設值


- 使用硬體來回復出廠預設值, 請按照下列步驟:
1. 按住「回復出廠預設值按鍵」10 秒鐘。
 2. 約40秒鐘後網路連接 LED 燈將熄滅再點亮。
 3. 網路伺服器將重新開機。
 4. 使用IPScan 軟體搜尋此 IP 設備。
 5. 使用網路瀏覽器開啟此 IP 設備。
 6. 輸入預設使用者名稱及密碼進行操作。
- 註1: 出廠預設的使用者名稱和密碼為空白, 由使用者自行設定輸入。
- 註2: 為方便使用者起見, 回復出廠預設值會回復到預設 IP 位址 192.168.0.200。

使用HTML頁面來設定IP位址

- 請先在網路瀏覽器網址列, 輸入預設IP位址192.168.0.200, 並按照下列步驟執行, 使用HTML頁面來更改IP位址:
1. 設定使用者名稱及密碼, 登錄 Full HD IP 攝影機
 2. 按「組態設定」超連結
 3. 按「網路設定」「一般設定」超連結
 4. 輸入或修改IP位址、子網路遮罩、網路閘道(Gateway)或HTTP連接埠
 5. 按「確認」鍵, 完成上述修改

使用IPScan軟體工具來設定IP位址

- 您可以使用IPScan(網路設備搜尋軟體)工具來設定IP位址。要更改IP位址、子網路遮罩、網路閘道, 或HTTP連接埠, 請參照下列步驟:
1. 執行IPScan軟體工具
 2. 按「更新表單」鍵, 區域網路內的所有設備將顯示在設備清單欄位
 3. 用滑鼠點選該設備
 4. 編輯或修改該設備之IP位址、子網路遮罩、網路閘道(Gateway)或HTTP連接埠等欄位
 5. 按「套用」鍵來更改該設定
 6. 按「更新表單」鍵來驗證該設定

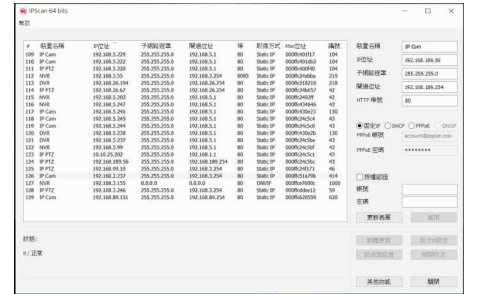

登入

出廠預設的使用者名稱和密碼為空白。欲登入Full HD 網路攝影機, 請在登入頁面, 設定使用者名稱及密碼並按下確認鍵, 可同時完成使用者設定並登入。

